



## Perfect protection, optimal safety and trouble-free handling

ROWEKO hosetube containers reliably protect your hoses from dirt and damage. They fulfil the requirements for silo trailer forwarders as stipulated by the food and chemical industries.

Manufactured from high quality polyethylene and assembled with rust-resistant mounting parts, the hosetube containers are available in a diverse range of designs. In addition, doors can be mounted on both sides, so that the hoses can be easily removed at narrow loading points. The cleanliness of the couplings can also be monitored more easily, without the hose having to be fully removed from the container. It is also easier to handle 2 short hoses.

ROWEKO offers a special design with an integrated drip tray for tank vehicles to comply with the regulation, which stipulates that residual contents in the hoses must not drip onto the road.



Custom solutions available upon request





# ROWEKO

KUNSTSTOFFVERARBEITUNG





1

## Hose tube container, single for silo vehicles

### Material

HD-PE black

### Execution

End-fitting and flange are fastened with 4 ea. VA rivets to the tube. The flange is riveted from inside to outside (exception: 125 mm). The cover is riveted with a VA hinge to the flange. The cover is locked as standard with a double-bit security rotary bolt. The locking latch grasps behind the aluminum locking bracket.

### Scope of delivery

Tube complete with mounted/riveted lid (cover with flange) and end-fitting.  
1 two-way key.

### Accessories / Options

- Tube support
- Other locking systems (p. 96)
- Door with flange on both sides
- Intermediate lengths are possible for all models (4% surcharge)

**1** Cover for Ø 250 mm with rounded corners

A-Ø x wall [mm]	Weight [kg/m]	Length [m]	Art. No.	Price [€]
<b>125 x 3.1</b>	1.23	2.4	<b>106 24 300</b>	
		5.0	<b>106 50 300</b>	
		6.0	<b>106 60 300</b>	
		7.0	<b>106 70 300</b>	
<b>160 x 3.9</b>	1.95	2.4	<b>101 24 300</b>	
		3.0	<b>101 30 300</b>	
		5.0	<b>101 50 300</b>	
		6.0	<b>101 60 300</b>	
		7.0	<b>101 70 300</b>	
		8.0	<b>101 80 300</b>	
<b>180 x 4.4</b>	2.48	10.0	<b>101 99 300</b>	
		2.4	<b>102 24 300</b>	
		3.0	<b>102 30 300</b>	
		5.0	<b>102 50 300</b>	
		6.0	<b>102 60 300</b>	
<b>200 x 4.9</b>	3.05	7.0	<b>102 70 300</b>	
		10.0	<b>102 99 300</b>	
		2.4	<b>103 24 300</b>	
		3.0	<b>103 30 300</b>	
		5.0	<b>103 50 300</b>	
		6.0	<b>103 60 300</b>	
<b>250 x 6.2</b>	4.83	7.0	<b>103 70 300</b>	
		8.0	<b>103 80 300</b>	
		10.0	<b>103 99 300</b>	
		2.4	<b>104 24 300</b>	
		5.0	<b>104 50 300</b>	
		6.0	<b>104 60 300</b>	
		7.0	<b>104 70 300</b>	
		<b>Intermediate lengths</b>		<b>125 99 901</b>

## Hose tube container, single for silo vehicles

### 1 Clip

3-piece, comprising a stainless steel 1.4301 U bracket (50 x 3 mm), black HD-PE end cap, incl. M10 screw (DIN 603), lock nut and U washer

#### Accessories

Article for Ø [mm]	Weight [kg]	Art. No.	Price [€]
<b>Clip</b>			
160	0.72	<b>401 00 001</b>	
180	0.80	<b>402 00 001</b>	
200	0.88	<b>403 00 001</b>	
250	1.10	<b>404 00 001</b>	
<b>VA screws for mounting on vehicle (set)</b>			
M8 x 20 (2 units)	0.04	<b>409 00 002</b>	



Instructions for applying clip



1

### 2 Chassis bracket – flat

2-piece, comprising a stainless steel 1.4301 tube bracket with clip (35 x 3 mm), black HD-PE base plate with tube contour and bores, without screws

#### Accessories

Article for Ø [mm]	Weight [kg]	Art. No.	Price [€]
<b>Chassis bracket flat</b>			
160	0.45	<b>401 00 535</b>	



2

### 3 Chassis bracket – round

2-piece, comprising an M10 stainless steel A2 tube bracket with 65 mm thread, incl. lock nut and U washer, black HD-PE base plate with tube contour and bores

#### Accessories

Article for Ø [mm]	Weight [kg]	Art. No.	Price [€]
<b>Chassis bracket round</b>			
125	0.36	<b>406 00 575</b>	
160	0.72	<b>401 00 575</b>	
180	0.80	<b>402 00 575</b>	
200	0.88	<b>403 00 575</b>	
250	1.10	<b>404 00 575</b>	



3

#### Fixing advice

Max. distance between clips 1500 mm  
e.g. 5000 mm tube = at least 4 clips

### 4 Cover and end-fitting

Cover with flange (HD-PE) black, completely mounted incl. security rotary bolt and 1 key (standard: two-way), end-fitting separate.

Other locking facilities (p. 96)

#### Spare parts

Article for Ø [mm]	Weight [kg]	Size [mm]	Art. No.	Price [€]
<b>Door with flange</b>				
125	0.33	150 x 150 x 35	<b>406 00 302</b>	
160	0.52	185 x 185 x 35	<b>401 00 302</b>	
180	0.58	205 x 205 x 35	<b>402 00 302</b>	
200	0.60	225 x 225 x 35	<b>403 00 302</b>	
250	0.88	290 x 295 x 35	<b>404 00 302</b>	
<b>End cap</b>				
125	0.06		<b>406 00 005</b>	
160	0.12		<b>401 00 005</b>	
180	0.16		<b>402 00 005</b>	
200	0.17		<b>403 00 005</b>	
250	0.26		<b>404 00 005</b>	
<b>HD-PE tube black, without attachments</b>				
40-1000			<b>On request</b>	



4



**Hose tube container double, for silo vehicles**

**Material**

HD-PE black

**Execution**

End piece and flange are each attached to the tube container with 8 VA rivets. The flange is riveted from inside to outside. The cover is riveted with two VA hinges to the flange. The cover is locked as standard with a double-bit security rotary bolt (for Ø 250 mm with two security rotary bolts). The locking latch grasps behind the aluminum locking bracket.

**Scope of delivery**

Tube complete with assembled/riveted lid (cover with flange) and end-fitting.  
1 two-way key (for Ø 250 mm with 2 keys).

**Accessories / Options**

- Tube support
- Other locking systems (p. 96)
- Door with flange on both sides
- Intermediate lengths are possible for all models (4% surcharge)

A-Ø x wall [mm]	Weight [kg/m]	Length [m]	Art. No.	Price [€]
<b>160 x 3.9</b>	3.90	2.4	<b>110 24 300</b>	
		3.0	<b>110 30 300</b>	
		5.0	<b>110 50 300</b>	
		6.0	<b>110 60 300</b>	
		7.0	<b>110 70 300</b>	
		8.0	<b>110 80 300</b>	
		10.0	<b>110 99 300</b>	
<b>180 x 4.4</b>	4.96	2.4	<b>111 24 300</b>	
		3.0	<b>111 30 300</b>	
		5.0	<b>111 50 300</b>	
		6.0	<b>111 60 300</b>	
		7.0	<b>111 70 300</b>	
		10.0	<b>111 99 300</b>	
<b>200 x 4.9</b>	6.10	2.4	<b>112 24 300</b>	
		3.0	<b>112 30 300</b>	
		5.0	<b>112 50 300</b>	
		6.0	<b>112 60 300</b>	
		7.0	<b>112 70 300</b>	
		8.0	<b>112 80 300</b>	
		10.0	<b>112 99 300</b>	
<b>250 x 6.2</b>	9.66	2.4	<b>114 24 300</b>	
		5.0	<b>114 50 300</b>	
		6.0	<b>114 60 300</b>	
		7.0	<b>114 70 300</b>	
<b>Intermediate lengths</b>			<b>125 99 901</b>	<b>+ 4 %</b>



1



2

Custom-made product  
On request

## Hose tube container double, for silo vehicles

### 1 Clip

#### Material

Stainless steel 1.4301,  
HD-PE black



Instructions for  
applying clip

#### Execution

3-piece, comprising:

- Bend return 50/60 x 3 mm, glossy
- Cover plate
- Coach bolt DIN 603, M10 with flat washer and self-locking nut

#### Fixing advice

Max. distance between clips 1500 mm  
e.g. 5000 mm tube = at least 4 clips

### 2 Door and end cap

#### Material

HD-PE black

#### Execution

Fully mounted door with flange, incl. security lock and 1 key (standard: double bit), end cap separate.

Other locking systems (p. 96)

### Accessories

Article for Ø [mm]	Weight [kg]	Art. No.	Price [€]
<b>Clip</b>			
160	1.09	<b>410 00 001</b>	
180	1.21	<b>411 00 001</b>	
200	1.33	<b>412 00 001</b>	
250	1.45	<b>414 00 001</b>	
<b>VA screws for mounting on vehicle (set)</b>			
M8 x 20 (4 pieces)	0.08	<b>419 00 002</b>	

### Spare parts

Article for Ø [mm]	Weight [kg]	Size [mm]	Art. No.	Price [€]
<b>Door with flange</b>				
160	0.83	185 x 350 x 35	<b>410 00 302</b>	
180	0.96	215 x 385 x 35	<b>411 00 302</b>	
200	1.04	230 x 425 x 35	<b>412 00 302</b>	
250	1.56	290 x 540 x 35	<b>414 00 302</b>	
<b>End cap</b>				
160	0.27		<b>410 00 005</b>	
180	0.33		<b>411 00 005</b>	
200	0.40		<b>412 00 005</b>	
250	0.51		<b>414 00 005</b>	
<b>HD-PE tube black, without attachments</b>				
40-1000			<b>On request</b>	



## Hose tube container triple for silo vehicles

### Material

HD-PE black

### Execution

End piece and flange are each attached to the tube container with 8 VA rivets. The flange is riveted from inside to outside. The cover is riveted with three VA hinges (for Ø 160 mm with two hinges) to the flange. The cover is locked as standard with two double-bit security rotary bolts. The locking latches grasp behind the aluminum locking bracket.

### Scope of delivery

Tube complete with assembled/riveted lid (cover with flange) and end-fitting.  
2 two-way key.

### Accessories / Options

- Tube support
- Other locking systems (p. 96)
- Door with flange on both sides
- Intermediate lengths are possible for all models (4% surcharge)

A-Ø x wall [mm]	Weight [kg/m]	Length [m]	Art. No.	Price [€]
<b>160 x 3.9</b>	5.85	2.4	<b>120 24 300</b>	
		3.0	<b>120 30 300</b>	
		5.0	<b>120 50 300</b>	
		6.0	<b>120 60 300</b>	
		7.0	<b>120 70 300</b>	
		8.0	<b>120 80 300</b>	
		10.0	<b>120 99 300</b>	
<b>180 x 4.4</b>	7.44	2.4	<b>123 24 300</b>	
		5.0	<b>123 50 300</b>	
		6.0	<b>123 60 300</b>	
		7.0	<b>123 70 300</b>	
		10.0	<b>123 99 300</b>	
<b>200 x 4.9</b>	9.15	2.4	<b>122 24 300</b>	
		3.0	<b>122 30 300</b>	
		5.0	<b>122 50 300</b>	
		6.0	<b>122 60 300</b>	
		7.0	<b>122 70 300</b>	
		8.0	<b>122 80 300</b>	
		10.0	<b>122 99 300</b>	
<b>Intermediate lengths</b>			<b>125 99 901</b>	<b>+ 4 %</b>



1

2

## Hose tube container triple for silo vehicles

### 1 Clip

#### Material

Stainless steel 1.4301,  
HD-PE black



Instructions for  
applying clip

#### Execution

- 3-piece, comprising:
- Bend return 50/60 x 3 mm, glossy
  - Cover plate
  - Coach bolt DIN 603, M10 with flat washer and self-locking nut

#### Fixing advice

Max. distance between clips 1500 mm  
e.g. 5000 mm tube = at least 4 clips

### 2 Door and end cap

#### Material

HD-PE black

#### Execution

Fully mounted door with flange incl.  
2 security locks and 2 keys (standard:  
double bit), end cap separate.


Other locking systems (p. 96)

### Accessories

Article for Ø [mm]	Weight [kg]	Art. No.	Price [€]
<b>Clip</b>			
160	1.45	<b>420 00 001</b>	
<b>VA screws for mounting on vehicle (set)</b>			
M8 x 20 (4 pieces)	0.08	<b>419 00 002</b>	

### Spare parts

Article for Ø [mm]	Weight [kg]	Size [mm]	Art. No.	Price [€]
<b>Door with flange</b>				
160	1.28	185 x 515 x 35	<b>420 00 302</b>	
180	1.53	215 x 580 x 35	<b>423 00 302</b>	
200	1.64	230 x 640 x 35	<b>422 00 302</b>	
200 With rounded corners	1.52	230 x 640 x 35	<b>422 00 382</b>	
<b>End cap</b>				
160	0.43		<b>420 00 005</b>	
180	0.45		<b>423 00 005</b>	
200	0.52		<b>422 00 005</b>	
<b>HD-PE tube black, without attachments</b>				
40-1000			<b>On request</b>	

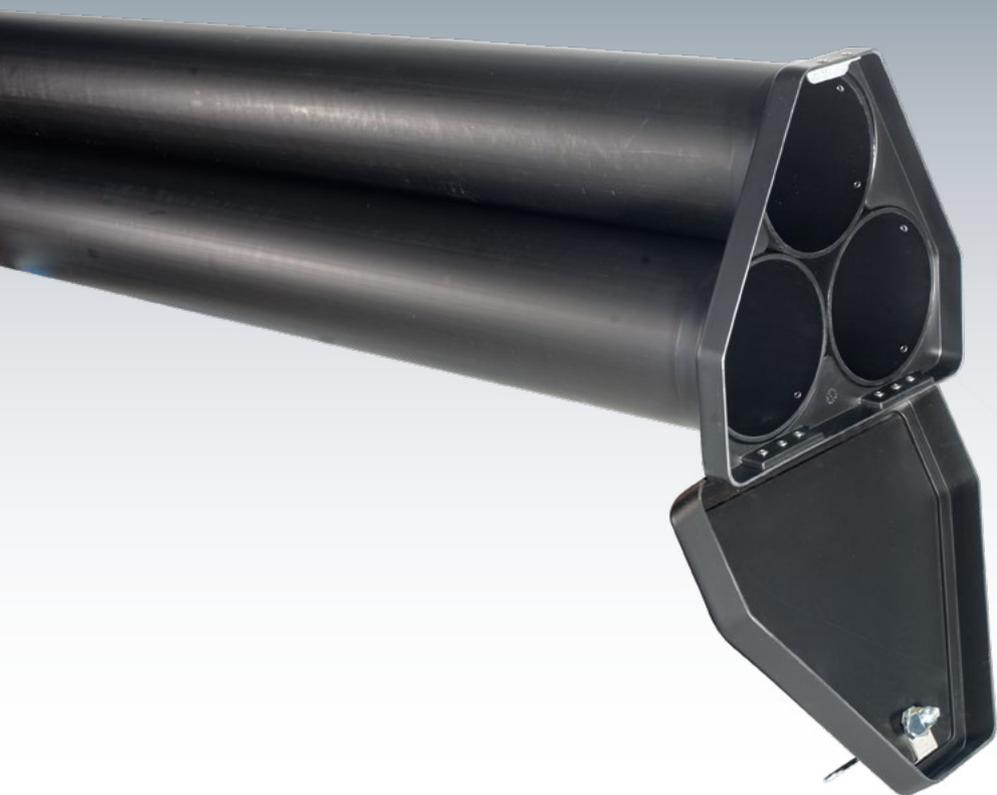

## Compact hose tube container, triple

### Material

HD-PE black

### Execution

End piece and flange are each attached to the tube container with 9 VA rivets. The flange is riveted from inside to outside. The cover is riveted with two VA hinges to the flange. The cover is locked standard with a double-bit security rotary bolt. The locking latches grasp behind the aluminum locking bracket.

### Scope of delivery

Tube complete with assembled/riveted lid (cover with flange) and end-fitting.  
1 two-way key.

### Accessories / Options

- Other locking systems (p. 96)
- Door with flange on both sides
- Intermediate lengths are possible for all models (4% surcharge)

A-Ø x wall [mm]	Weight [kg/m]	Length [m]	Art. No.	Price [€]
160 x 3.9	5.85	2.4	121 24 300	
		3.0	121 30 300	
		5.0	121 50 300	
		6.0	121 60 300	
		7.0	121 70 300	
		8.0	121 80 300	
		10.0	121 99 300	
200 x 4.9	9.15	2.4	124 24 300	
		3.0	124 30 300	
		5.0	124 50 300	
		6.0	124 60 300	
		7.0	124 70 300	
		8.0	124 80 300	
		10.0	124 99 300	
Intermediate lengths			125 99 901	+ 4 %



1

2

## Compact hose tube container, triple

### 1 Clip

#### Material

Stainless steel 1.4301, HD-PE black

#### Execution

3-piece, comprising:

- Tube bracket with clip (50 x 3 mm)
- Base plate with tube contour and bores
- with M8 x 40 galvanised screws (DIN 603), U washer and lock nut

#### Fixing advice

Max. distance between clips 1500 mm  
e.g. 5000 mm tube = at least 4 clips

### 2 Door with flange and end cap

#### Material

HD-PE black

#### Execution

Fully mounted door with flange incl. security lock (double bit) and 1 key.  
End cap separate.


Other locking systems (p. 96)

### Accessories

Article for Ø [mm]	Weight [kg]	Art. No.	Price [€]
<b>Clip</b>			
160	1.45	<b>421 00 001</b>	
200	1.65	<b>424 00 001</b>	

### Spare parts

Article for Ø [mm]	Weight [kg]	Size [mm]	Art. No.	Price [€]
<b>Door with flange</b>				
160	0.97	350 x 330 x 35	<b>421 00 302</b>	
200	1.28	430 x 415 x 40	<b>424 00 302</b>	
<b>End cap</b>				
160	0.40		<b>421 00 005</b>	
200	0.48		<b>424 00 005</b>	
<b>HD-PE tube black, without attachments</b>				
40-1000			<b>On request</b>	

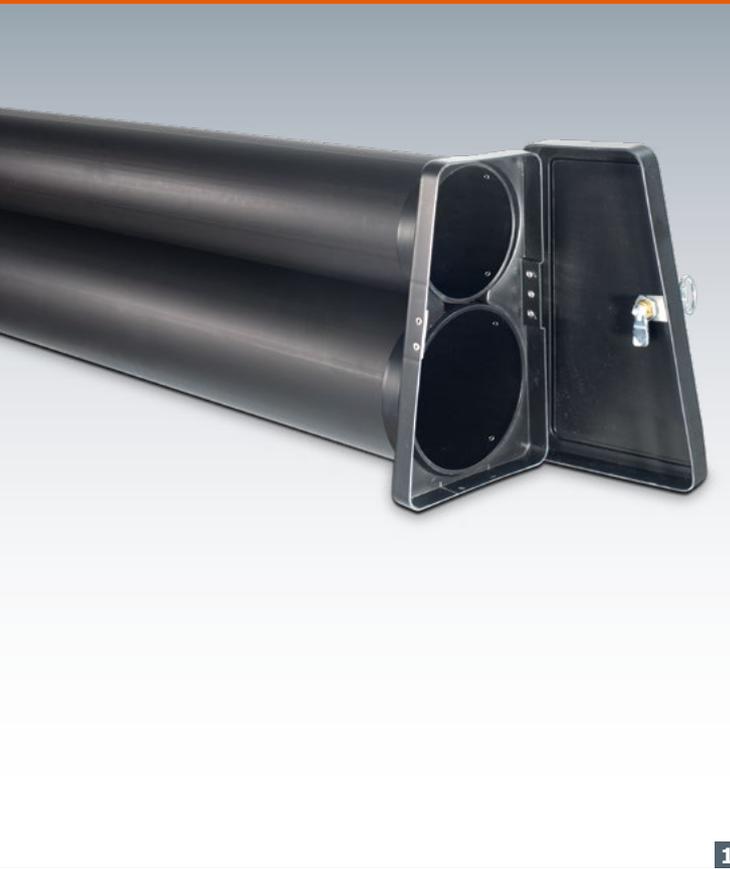

1



2

## Hose tube container, combination, double

### Material

HD-PE black

### Execution

**A-Ø of bottom tube: 200 x 4.9 mm**

**A-Ø of top tube: 160 x 3.9 mm**

End piece and flange are each attached to the tube container with 8 VA rivets. The flange is riveted from inside to outside.

The cover is riveted with a VA hinge to the flange. The cover is locked standard with a double-bit security rotary bolt. The locking latches grasp behind the aluminum locking bracket.

### Scope of delivery

Tube complete with assembled/riveted lid (cover with flange) and end-fitting, buffer tank, 1 two-way key.

### Accessories / Options

- Tube support
- Other locking systems (p. 96)
- Door with flange on both sides
- Intermediate lengths are possible for all models (4% surcharge)

### 1 Hinge on the side

Article	Weight [kg/m]	Length [m]	Art. No.	Price [€]
Hinge on the side	5.00	2.4	130 24 301/2	
		3.0	130 30 301/2	
		5.0	130 50 301/2	
		6.0	130 60 301/2	
		7.0	130 70 301/2	
		8.0	130 80 301/2	
		10.0	130 99 301/2	
Intermediate lengths			125 99 901	+4%


Hinge on the left (= 1) or right (= 2)

### 2 Hinge at the bottom

Article	Weight [kg/m]	Length [m]	Art. No.	Price [€]
Hinge at the bottom	5.00	2.4	131 24 300	
		3.0	131 30 300	
		5.0	131 50 300	
		6.0	131 60 300	
		7.0	131 70 300	
		8.0	131 80 300	
		10.0	131 99 300	
Intermediate lengths			125 99 901	+ 4 %



1

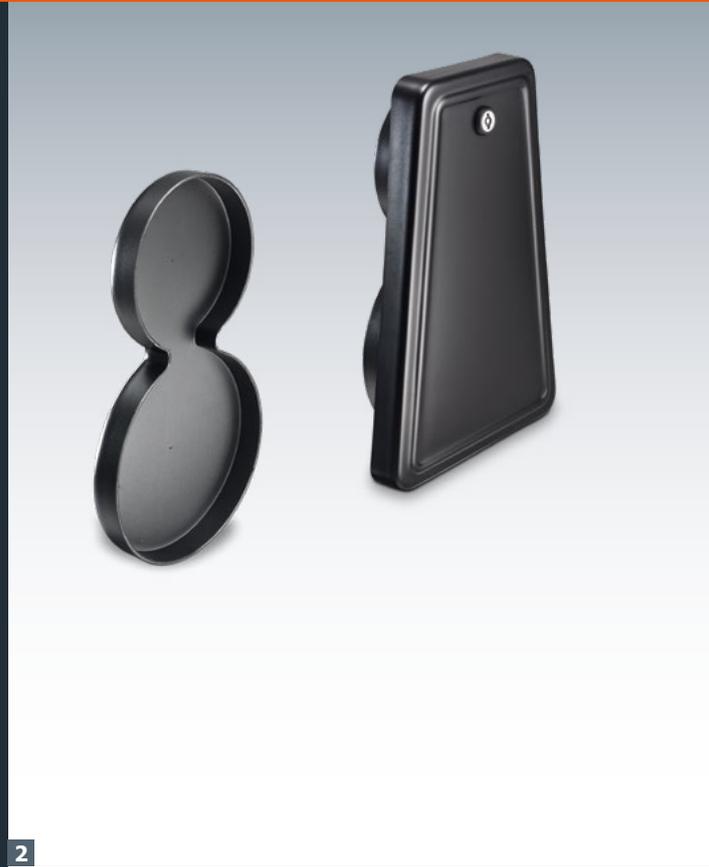

2

## Hose tube container, combination, double

### 1 Clip

#### Material

Rear bracket (galvanised steel) with welded clip, front bracket (alu blank)

#### Execution

2-piece with mounting plate, no screws

**Attention: not a stock item!**

**Minimum order volume 4 pc.**

#### Fixing advice

Max. distance between clips 1500 mm  
e.g. 5000 mm tube = at least 4 clips

### 2 Door with flange, end cap, tube

#### Material

HD-PE black

#### Execution

Fully mounted door with flange incl. security lock and 1 key (standard: double bit), end cap separate.

Other locking systems (p. 96)

#### Accessories

Article for Ø [mm]	Weight [kg]	Art. No.	Price [€]
<b>Clip</b>			
200/160	1.43	<b>430 00 001</b>	

#### Spare parts

Article	Weight [kg]	Size [mm]	Art. No.	Price [€]
<b>Door with flange</b>				
Hinge on the left side	0.91	245 x 390 x 35	<b>430 00 301</b>	
Hinge on the right side	0.91	245 x 390 x 35	<b>430 00 302</b>	
Hinge at the bottom	0.91	245 x 390 x 35	<b>431 00 302</b>	
<b>End cap</b>	0.31		<b>431 00 005</b>	
<b>HD-PE tube, black</b>				
40-1000			<b>On request</b>	