



Hose tube containers, single, for tanker vehicles

Material

HD-PE black

Execution

End piece and flange are each attached to the tube container with 4 VA rivets. The flange is riveted from inside to outside. The cover is riveted with a VA hinge to the flange and has an EPDM string-type gasket. The buffer tank is pushed into the flange. The cover is locked as standard with a double-bit security rotary bolt. The locking latch grasps behind the aluminum locking bracket.

Scope of delivery

Tube complete with assembled/riveted lid (cover with flange) and end-fitting, buffer tank, 1 two-way key.

Accessories / Options

- Tube support
- Other locking systems (p. 96)
- Intermediate lengths are possible for all models (4% surcharge)

A-Ø x wall [mm]	Weight [kg/m]	Length [m]	Art. No.	Price [€]
160 x 3.9	1.95	2.4	101 24 371/2	
		3.0	101 30 371/2	
		5.0	101 50 371/2	
		6.0	101 60 371/2	
		7.0	101 70 371/2	
		8.0	101 80 371/2	
		10.0	101 99 371/2	
180 x 4.4	2.48	2.4	102 24 371/2	
		3.0	102 30 371/2	
		5.0	102 50 371/2	
		6.0	102 60 371/2	
		7.0	102 70 371/2	
		10.0	102 99 371/2	
Intermediate lengths			125 99 901	+ 4 %

Hinge on the left (=1) or right (=2)



Instructions for applying clip

1 Clip



3 Chassis bracket flat

2 Chassis bracket round



4

Hose tube containers, single, for tanker vehicles

1 Clip

3-piece, comprising a stainless steel 1.4301 U bracket (50 x 3 mm), black HD-PE end cap, incl. M10 screw (DIN 603), lock nut and U washer

2 Chassis bracket – round

2-piece, comprising an M10 stainless steel A2 tube bracket with 65 mm thread, incl. lock nut and U washer, black HD-PE base plate with tube contour and bores

3 Chassis bracket – flat

2-piece, comprising a stainless steel 1.4301 tube bracket with clip (35 x 3 mm), black HD-PE base plate with tube contour and bores, without screws

Fixing advice

Max. distance between clips 1500 mm
e.g. 5000 mm tube = at least 4 clips

4 Door and end cap

Material

HD-PE black

Execution


Fully mounted door with flange incl. security lock and 1 key (standard: double bit).
Other locking systems (p. 96)
Collecting tray and end cap separate.

Accessories

Article for Ø [mm]	Weight [kg]	Art. No.	Price [€]
1 Clip			
160	0.72	401 00 001	
180	0.80	402 00 001	
VA-coach bolts for assembly to the vehicle (set)			
M8 x 20 (2 units)	0.04	409 00 002	
2 Chassis bracket round			
160	0.72	401 00 575	
180	0.80	402 00 575	
3 Chassis bracket flat			
160	0.45	401 00 535	

Spare parts

Article for Ø [mm]	Weight [kg]	Size [mm]	Art. No.	Price [€]
Door with flange (without collecting tray)				
160 Hinge left	0.85	195 x 270 x 95	401 00 351	
160 Hinge right	0.85	195 x 270 x 95	401 00 352	
180 Hinge left	0.96	220 x 305 x 95	402 00 351	
180 Hinge right	0.96	220 x 305 x 95	402 00 352	
End cap				
160	0.12		401 00 005	
180	0.16		402 00 005	
Collecting tray				
160	0.19		425 31 000	
180	0.20		425 32 000	
HD-PE-tube, black				
40-1000			On request	

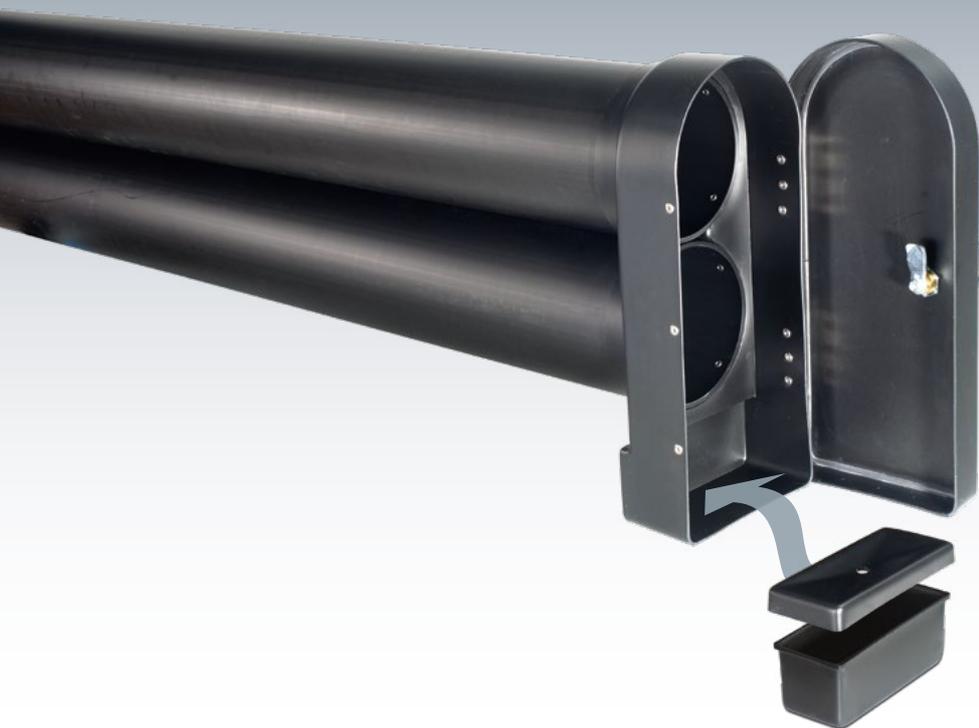

Hose tube containers, double, for tanker vehicles

Material

HD-PE black

Execution

End piece and flange are each attached to the tube container with 8 VA rivets. The flange is riveted from inside to outside. The cover is riveted with a VA hinge to the flange and has an EPDM string-type gasket. The buffer tank is pushed into the flange. The cover is locked as standard with a double-bit security rotary bolt. The locking latch grasps behind the aluminum locking bracket.

Scope of delivery

Tube complete with assembled/riveted lid (cover with flange) and end-fitting, buffer tank, 1 two-way key.

Accessories / Options

- Tube support
- Other locking systems (p. 96)
- Door with flange on both sides
- Intermediate lengths are possible for all models (4% surcharge)

A-Ø x wall [mm]	Weight [kg/m]	Length [m]	Art. No.	Price [€]
160 x 3.9	3.90	2.4	110 24 371/2	
		3,0	110 30 371/2	
		5,0	110 50 371/2	
		6,0	110 60 371/2	
		7,0	110 70 371/2	
		8,0	110 80 371/2	
		10,0	110 99 371/2	
180 x 4.4	4.96	2,4	111 24 371/2	
		3,0	111 30 371/2	
		5,0	111 50 371/2	
		6,0	111 60 371/2	
		7,0	111 70 371/2	
		10,0	111 99 371/2	
Intermediate lengths			125 99 901	+ 4 %

Hinge on the left (=1) or right (=2)



1



2

Hose tube containers, double, for tanker vehicles

1 Clip

Material

Stainless steel 1.4301,
HD-PE black



Instructions for applying clip

Execution

- 3-piece, comprising:
- Bend return 50/60 x 3 mm, glossy
 - Cover plate
 - Coach bolt DIN 603, M10 with flat washer and self-locking nut

Fixing advice

Max. distance between clips 1500 mm
e.g. 5000 mm tube = at least 4 clips

2 Door and end cap

Material

HD-PE black

Execution

Fully mounted door with flange incl. security lock and 1 key (standard: double bit).

Other locking systems (p. 96)

Collecting tray and end cap separate.

Accessories

Article for Ø [mm]	Weight [kg]	Art. No.	Price [€]
Clip			
160	1.09	410 00 001	
180	1.21	411 00 001	
VA-coach bolts for assembly to the vehicle (set)			
M8 x 20 mm (4 units)	0.08	419 00 002	

Spare parts

Article for Ø [mm]	Weight [kg]	Size [mm]	Art. No.	Price [€]
Door with flange (without collecting tray)				
160 Hinge left	1.22	195 x 440 x 95	410 00 351	
160 Hinge right	1.22	195 x 440 x 95	410 00 352	
180 Hinge left	1.50	220 x 490 x 95	411 00 351	
180 Hinge right	1.50	220 x 490 x 95	411 00 352	
End cap				
160	0.27		410 00 005	
180	0.33		411 00 005	
Collecting tray				
160	0.19		425 31 000	
180	0.20		425 32 000	
HD-PE tube, black				
40-1000			On request	