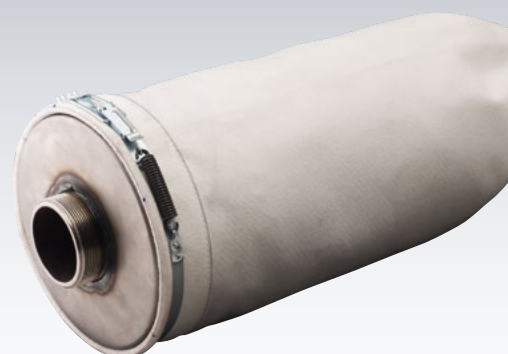



1

2

3

Exhaust air purification

Material

Tube: HD-PE black

Filter: Polyester needle felt (FOS-tex 7-022)

Execution

Tube: Tube Ø of 250 x 6.1 mm, length of 2,000 mm, front cap with filter tube is retained by means of 3 clamps (riveted to tube), end cap with air outlet slots and internal spray protect, welded to the tube.

Filter: Filter tube Ø of 200 mm, length of 1,800 mm, moisture refuse, air permeability of approx. 250 l/m²/min, filter tube lid Ø of 200 mm, 50 mm high with welded-on steep nipple. R2 ½" external thread.

Strap with control spring for filter tube.

Accessories:

Fastening clip

- 1** Fastening clip
- 2** End cap with internal spray protect
- 3** Filter unit

Article	Weight [kg]	Art. No.	Price [€]
Tube	11.20	104 20 001	
Filter unit	1.60	404 20 001	

Accessories

Article	Weight [kg]	Art. No.	Price [€]
Fastening clip for exhaust air purification, 2 parts, consisting of: Elbow with plates made from stainless steel and tube carrier plate made from polyethylene (HD-PE), without screws	1.40	404 00 004	

Spare parts

Article	Weight [kg]	Art. No.	Price [€]
Front cap with hole	0.25	404 00 002	
Clamp for front cap	0.05	413 00 009	
End cap with air outlet slots and internal spray protection	0.55	404 00 003	
Filter tube (L = 1,800 mm)	0.55	404 20 002	
Filter tube lid with thread	0.25	404 20 003	
Strap with control spring	0.08	404 20 004	